

**K42 Hardware Kit Includes:**

- 1/4-20x1/2" Machine Screw (2) 900-91772A537
- 1/4" Lock Washer (2) 900-92146A029
- Snap-in Plug, 3/4"OD (2) 900-9688K331W
- 1/4-20x1" Drop-in Anchor (2) 900-01105
- 1/4" Anchor Setting Tool \* (REF) 900-01106

\* Above tool bagged separately, 1-3 included per job.

**Materials/Tools Required:**

- Level
- Pencil
- Tape Measure
- Hammer
- Drill with 3/8" masonry drill bit
- #3 Phillips Head bit with 2" extension

**Recommended Cleaning Materials:**


- Lint Free Cloth or Wipes
- Fantastik® All-Purpose Heavy Duty Cleaner

**Step 1:**

Determine sign post mounting location against wall (Note: sign height to be determined by end user for optimal sign visibility). Measure mounting hole locations A and B in lower end of post (typically holes are predrilled through aluminum post, on center into post, starting 6" from bottom and 18" apart between centers) to determine anchor locations. Mark wall with pencil at mounting hole height locations.


Use 3/8" diameter masonry bit to drill holes 1" minimum to 1-1/32" maximum depth in wall on marks.

1/2" Minimum Clearance Recommended Between Floor and Post to Allow For Moisture Drainage

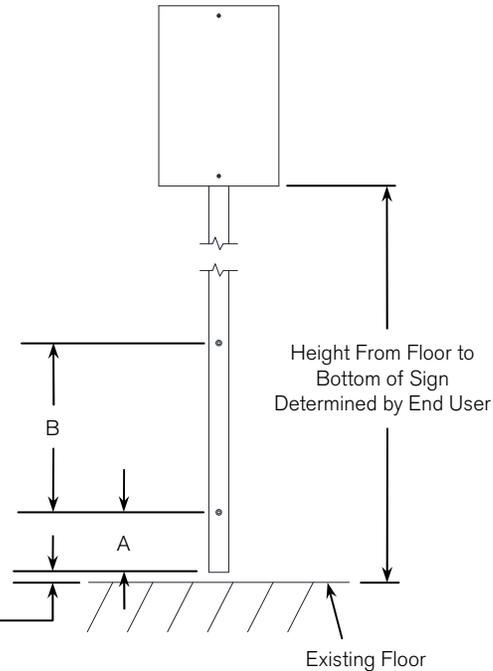

**Step 2a:**


Insert anchors firmly into holes in wall, threaded end facing out, and tap remaining head of anchors in holes using hammer to seat flush. Proceed to step 2b.



**Step 2b:**

Locate setting tool packaged separately. This is required to properly set anchors into concrete.


For each anchor, insert smaller diameter end of setting tool into threaded end of anchor. While maintaining setting tool in line with anchor, hammer end of setting tool, driving it into anchor until shoulder protrudes 1/8" to 1/16" from end of anchor.

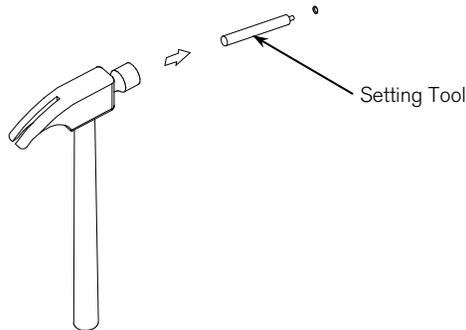

**Step 3:**

Install sign post flush against wall using 1/4" lock washers and 1/4-20 machine screws. Use level to ensure sign is level/plumb. Note: screws to be flush against inside wall of post directly against wall.

Install snap-in plugs to cover holes.

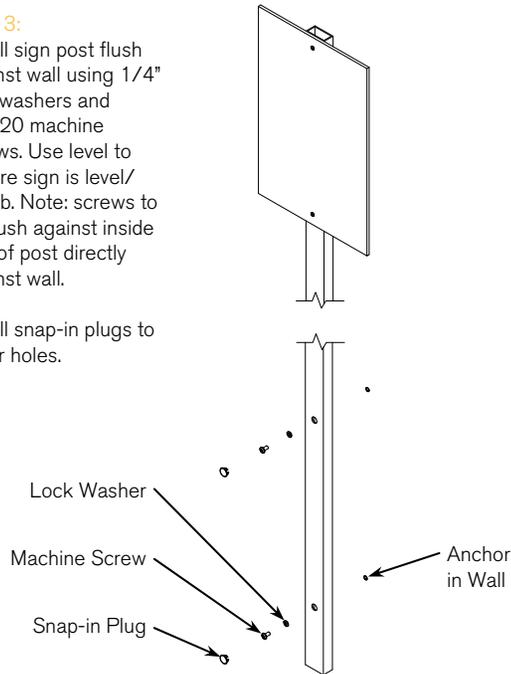

**Step 4:**

Remove finger prints from sign using mild non-abrasive household cleaning agents, such as water and mild liquid dish soap. DO NOT use ammonia or alcohol based cleaners.

