

K15

**Materials/Tools Required:**

Level  
 Pencil  
 Masking Tape  
 Application Fluid  
 Burnishing Tool

**Recommended Cleaning Materials:**


Lint Free Cloth or Wipes  
 Mild soap and water solution

**Important Installation Guidelines:**

- Glass surface must be smooth, clean and dry.
- Install temperature must be 50°F to 75°F.
- Do not install onto surfaces with anti-graffiti coating.


**K15 - Vinyl Letter Application (Glass)**

**Step 1:**  
 Clean glass surface. Using a straight edge, draw a pencil line along bottom of lettering for reference. Assuring level, position lettering on surface and apply masking tape along top edge.

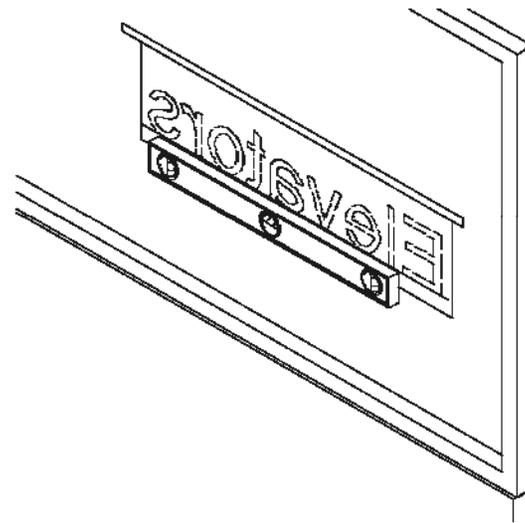


**Step 2:**  
 Flip lettering up to access backside. Pull off adhesive liner on letters only. Spray application fluid to vinyl.

Note: If vinyl lettering is too long, cut between letters to break into manageable sections.

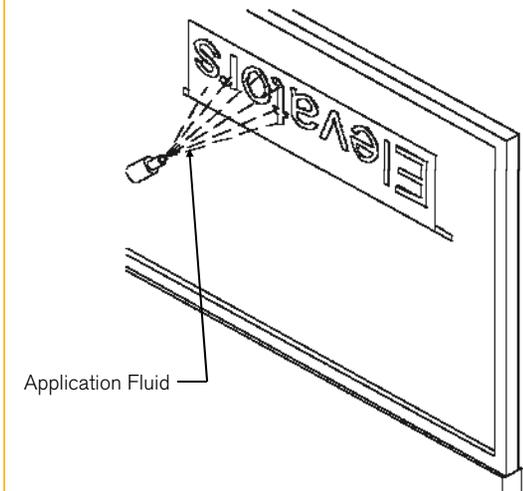


**Step 3:**  
 Press vinyl to window (note: application fluid allows position to be adjusted). Use burnishing tool to remove excess fluid and air bubbles from behind vinyl. Start burnishing in middle and work out to edges.


Note: Allow 15-20 minutes to dry.

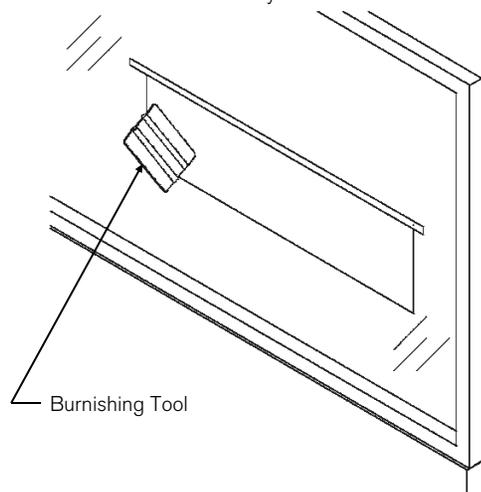

**Step 4:**  
 Pull release paper on an angle, in accordance with drawing below. If vinyl starts to lift, replace release paper and use burnishing tool to remove bubbles. If vinyl keeps lifting, spray application fluid onto transfer tape and burnish down completely.

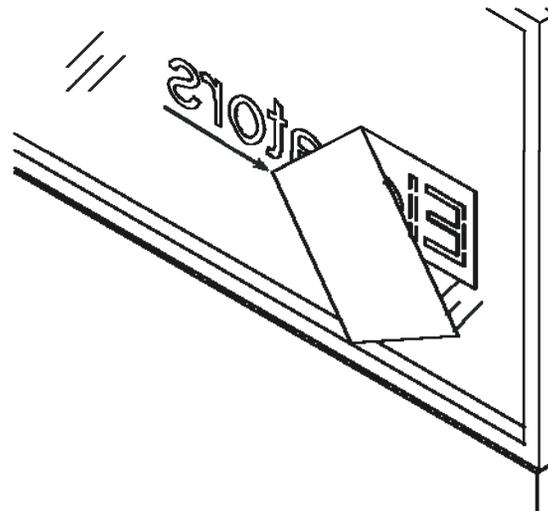

**Step 5:**  
 Remove finger prints from window using recommended cleaning materials. DO NOT use ammonia or alcohol based cleaners.

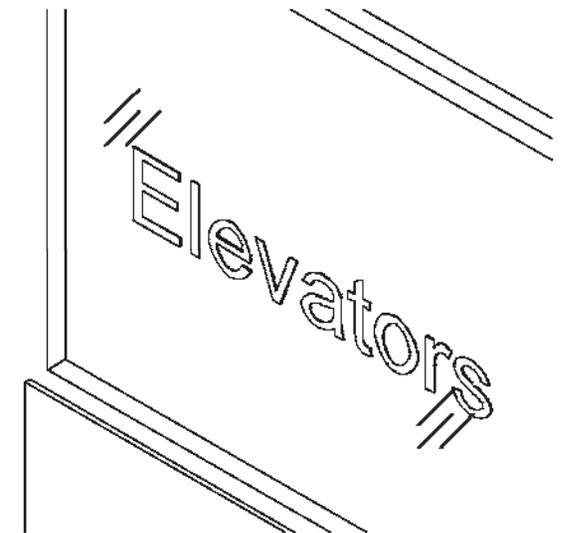

K15

**Materials/Tools Required:**

- Level
- Pencil
- Masking Tape
- Burnishing Tool
- Tape Measure

**Recommended Cleaning Materials:**

Mild soap and water solution


**Important Installation Guidelines:**

- Wall surface must be, flat, smooth, clean and dry.
- Install temperature must be 50°F to 75°F.
- Do not install onto walls with oil-based paint finish or anti-graffiti coating.
- Allow paint to dry for 30 days prior to installation to avoid outgassing of paint and bubbling of graphic.

K15 - Vinyl Letter Application


**Step 1:**

Wipe down wall using a dusting brush, lint free cloth, or damp sponge to remove dust and debris. Using a straight edge, draw a pencil line along bottom of lettering for reference. Assuring level, position lettering on surface and apply masking tape along top edge.

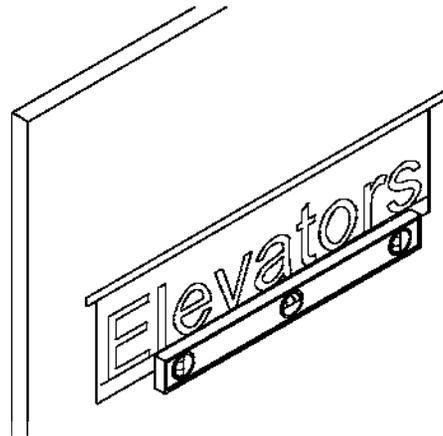


**Step 2:**

Flip lettering up to access backside. Pull off adhesive liner on letters only. Be sure not to let the adhesive side of the vinyl touch itself.

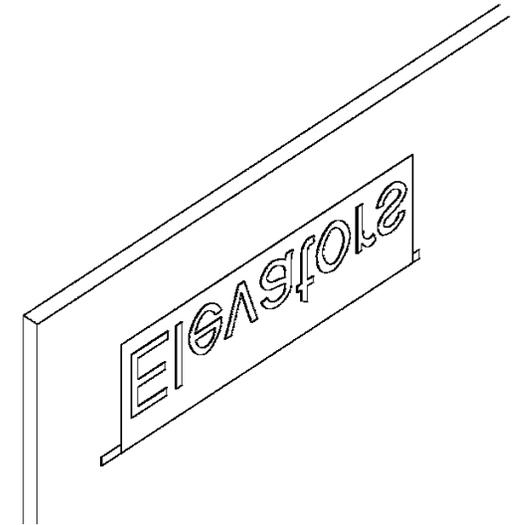


**Step 3:**

Flip vinyl down to apply to wall. Smooth vinyl against wall with a squeegee, starting at the top and working from center outward as you work your way down. Be sure to remove all air bubbles and wrinkles. If any bubbles or wrinkles remain, gently peel away from wall and reapply with squeegee.

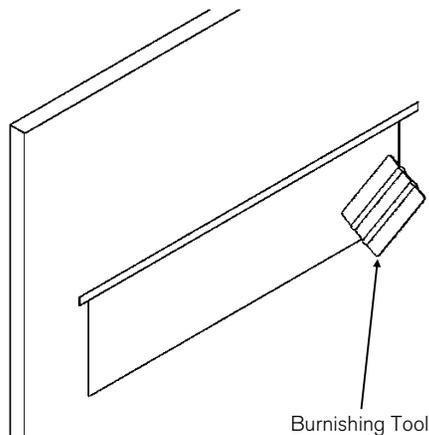

**Step 4:**

Carefully peel application tape from front face on a 180° angle. Do not pull the application tape straight out as this can pull up the vinyl. If vinyl starts to lift, replace application tape and squeegee over vinyl again before removing.

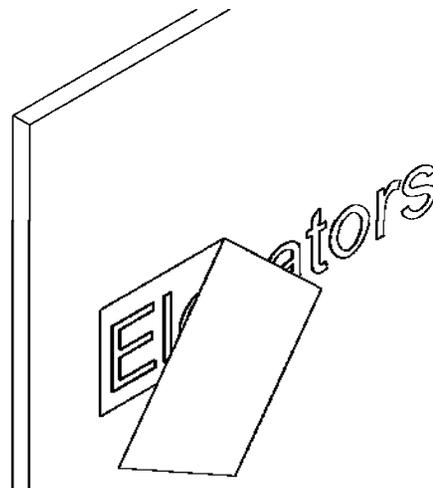

**Step 5:**

Clean the vinyl using recommended cleaners and wipe with a lint free cloth.

